

FLOOR PLAN



0' 2' 4' 8'

GENERAL NOTES

- THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR CHECKING CONTRACT DOCUMENTS, FIELD CONDITIONS, AND DIMENSIONS FOR ACCURACY AND CONFIRMING THAT ALL WORK IS BUILDABLE AS SHOWN BEFORE PROCEEDING WITH CONSTRUCTION. IF THERE ARE ANY DISCREPANCIES OR OMISSIONS WHICH WOULD INTERFERE WITH SATISFACTORY COMPLETION OF THE WORK, THE CONTRACTOR SHALL OBTAIN A CLARIFICATION FROM THE ARCHITECT OR OWNER BEFORE PROCEEDING WITH THE WORK IN QUESTION.
- THE GENERAL CONTRACTOR IS RESPONSIBLE FOR THE MEANS, METHODS, AND TECHNIQUES OF CONSTRUCTION AND ALL SAFETY PRECAUTIONS IN CONNECTION WITH THE WORK.
- CONTRACTOR SHALL ACQUIRE ALL PERMITS PRIOR TO PROCEEDING WITH THE WORK.
- CONTRACTOR SHALL COORDINATE ALL MECHANICAL, PLUMBING, AND ELECTRICAL REQUIREMENTS WITH 'A' SERIES DRAWINGS.
- LOCATIONS OF DOORS IN STOREFRONT SYSTEM ARE APPROXIMATE. FINAL LOCATION SHALL BE DETERMINED DURING SHOP DRAWING REVIEW.

NOTE:  
 3500 P.S.I. CONCRETE  
 W/ 6 X 6 - W/ 4 X W/ 4  
 SUB-GRADE COMPACTED

BROOM FINISH UNLESS OTHERWISE NOTED

GROOVED JOINT AT 5'-0" O.C. OR AS SHOWN ON PLAN

PREMOULDED EXPANSION JOINT MATERIAL AT 30'-0" O.C. OR AS SHOWN ON PLAN


SCALE: 1 1/2" = 1'-0"

DOOR SCHEDULE

NO.	DOOR WIDTH	DOOR HEIGHT	DOOR THICK.	DOOR TYPE	DOOR ELEV.	FRAME	HRDWR. SET	REMARKS
1	3'-0"	7'-0"	---	ALUM. FULL GLASS	A	ALUM.	1	NARROW STYLE
2	3'-0"	7'-0"	1 3/4"	HOLLOW METAL	B	ALUM.	2	4" HEAD / INSULATED DOOR
3	6'-0"	7'-0"	---	SLIDING GLASS DOOR	C	ALUM.	3	FRAME / DOOR UNIT / GLASS
4	PR. 3'-0"	7'-0"	---	ALUM. FULL GLASS	A SIM.	ALUM.	4	NARROW STYLE

HARDWARE SCHEDULE

- SET No. 1 OFFSET PIVOTS, NORTON 1605 SURFACE CLOSER STANDARD CO-9 PULL AND CP-11 PUSH BAR ADAMS RITE MS 4510 DEADLOCK WITH #4590 LATCH PADDLE THRESHOLD, CYLINDERS BY HARDWARE SUPPLIER ALL OTHER HARDWARE BY DOOR MANUFACTURER
- SET No. 2 1 1/2 PR. BUTTS BB191HRP 4 1/2 x 4 1/2 US26 D CLOSER LCN 1074 SET WEATHER-STRIP 3190N - PEMED LOCK GUARD 886V AC THRESHOLD 886V AC RAIN DRP 810S 40" AL
- SET No. 3 ALL HARDWARE BY DOOR MANUFACTURER
- SET No. 4 OFFSET PIVOTS, NORTON 1605 SURFACE CLOSER STANDARD CO-9 AND CP-11 PUSH BAR, 1 SET FLUSH BOLTS ADAMS RITE MS 4510 DEADLOCK WITH #4590 LATCH PADDLE THRESHOLD, CYLINDERS BY HARDWARE SUPPLIER ALL OTHER HARDWARE BY DOOR MANUFACTURER

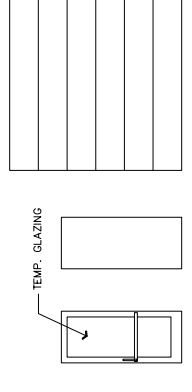

DOOR ELEVATIONS

SECTION

EXP. JOINT AT SIDEWALK